

FINGKEY ACCESS is a cost effective fingerprint access control system capable of speedy authentication with LFD function (Live Finger Detection) and supports Waterproof at the level of IP65 for outdoor use. It offers you enterprise level of Entry and Time Attendance management with its LAN communication-based network infrastructure enabling integrated monitoring and systematic management of multiple terminals operated independently on a remote location. Compact and stylish design with user freindly interface, FINGKEY ACCESS knocks your door to be safe more than ever.



FEATURES

- Remote control and real-time access monitoring by means of server program (AccessManager)
- Auto-on functions
- User's setup function reinforced
- Reduced ID matching opportunity provided
- Buzzer information
- Various authentication media supported
Fingerprint/Password/ RF card or any combination of the means
- LFD (Live Finger Detection)
- Touch Keypad with Backlight
- IP65 rated waterproof
- CE, FCC certificated

PRODUCT TYPE


MODEL TYPE	DESCRIPTION
Standard Type	Fingerprint + Password
HID / EM Type	125KHz RF Card (HID, EM)
Mifare Type	13.56MHz RF Card (Mifare)

SPECIFICATIONS

ITEM	SPECIFICATION	
CPU	32-bit / 200MHz	
Memory	8MB Flash	
Display	128x32 Graphic LCD (Black&White)	
Fingerprint Sensor	Type	Optical
	Resolution	500 DPI
Authentication Mode	Fingerprint, Password, RF Card(HID/Mifare)	
Fingerprint Sensor Authentication Method	1:1, 1:N, Reduced ID Matching	
1:1 Verification Time	Less than 1 sec.	
1:N Identification Time	Less than 2sec.(2,000 templates)	
Template Capacity	2,000 templates (extensible)	
Log capacity	20,000 logs (extensible)	
Communication	TCP/IP, RS232, Wiegand(26/34 bits)	
Output Relay	Deadbolt, EM Lock, Door Strike, Automatic Door	
Operating Temperature	-20 ~ 60 °C	
Operation Humidity	10 ~ 90 %	
Certification	CE, FCC	
Size	90(W) x 205(L) x 50(D) mm	

AccessManager

AccessManager consists of Access Server, Remote manager, Remote monitor, it is an ideal solution for user administration and monitoring.

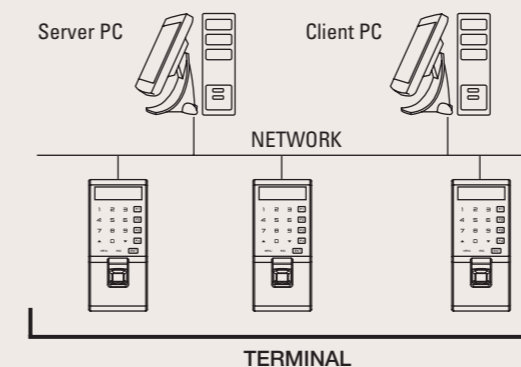

ITEM	SPECIFICATION	
Components	Access Server/Remote Manager/Remote Monitor	
# of accessible terminals	ACM Pro.	Max. 2,000 terminals
	ACM v2.57x	Max. 255 terminals(available soon)
# of accessible remote client PCs	8 clients	
Supportable OS	above Windows 2000	
# of users enrolled	ACM Pro.	100,000 users (SQL Express)
	ACM v2.57X	10,000 users(MDB/SQL) (available soon)